

Our most versatile module, Garda Classic offers both symmetric and asymmetric distributions in a variety of colour temperatures, making it suitable for a wide range of handrail applications.

Typical applications: stairwells, bridges, architectural.


Performance

	2700K	3000K	4000K
Symmetric Module			
300mm	201lm	281lm	335lm
600mm	402lm	563lm	670lm
900mm	602lm	843lm	1004lm
1200mm	803lm	1126lm	1338lm
Asymmetric Module			
300mm	146lm	204lm	244lm
600mm	293lm	410lm	489lm
900mm	440lm	616lm	733lm
1200mm	586lm	821lm	977lm


Mechanical

Housing	Stainless steel Aluminium
Glazing	Polycarbonate
Colours	Brushed stainless steel Powder coated aluminium (Other RAL colours on request)
IP Rating	IP66
IK Rating	IK10

Symmetric Module

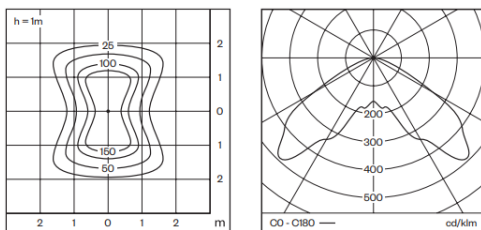

Asymmetric Module

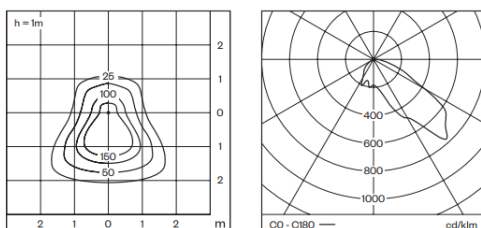

Electrical

	48V AC	48V DC	24V AC	24V DC
300mm	3.6W	3.6W	4.2W	3.6W
600mm	7.2W	7.2W	8.3W	7.2W
900mm	10.8W	10.8W	12.5W	10.8W
1200mm	14.4W	14.4W	16.7W	14.4W

Class Control	Class III Variable resistance dimming 1-10V DALI DMX (via DALI converter)
----------------------	---

Lifetime Certifications	100,000 hours UKCA, CE
--------------------------------	---------------------------