


Designed for applications with a focus on appearance, Garda Comfort offers a continuous, homogeneous light source with no visible LEDs. Advanced optics provide a highly diffused symmetrical distribution for maximum visual comfort.

Typical applications: public realm, residential, commercial.

Performance

	2700K	3000K	4000K
Symmetric Module			
300mm	294lm	300lm	320lm
600mm	647lm	654lm	703lm
900mm	995lm	1005lm	1081lm
1200mm	1352lm	1367lm	1470lm

Symmetric Module

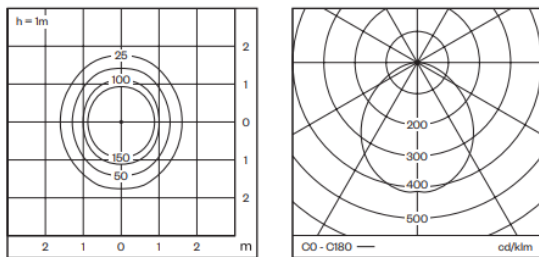

Mechanical

Housing	Stainless steel Aluminium
Glazing	Polycarbonate
Colours	Brushed stainless steel Powder coated aluminium (Other RAL colours on request)
IP Rating	IP66
IK Rating	IK10

Electrical

	48V AC	48V DC	24V AC	24V DC
300mm	-	-	-	3.8W
600mm	-	-	-	9.2W
900mm	-	-	-	14.3W
1200mm	-	-	-	21.0W

Class	Class III
Control	Variable resistance dimming 1-10V DALI DMX (via DALI converter)

Lifetime	100,000 hours
Certifications	UKCA, CE